

# Estimation of average waiting time by using simulation & queuing analysis in radiotherapy section

<sup>#1</sup>Ishan P. Lade, <sup>#2</sup>A. T. Wadgure, <sup>#3</sup>P. K. Kamble, <sup>#4</sup>V. P. Sakhare



<sup>1</sup>kavya98.ipl@gmail.com  
<sup>2</sup>arvindwadgure020@gmail.com  
<sup>3</sup>prashim.friend@gmail.com  
<sup>4</sup>vinod\_sakhare444@yahoo.co.in

<sup>#1234</sup>Department of Mechanical Engineering, Datta Meghe Institute of Engineering, Technology & Research, Wardha(MH), India

## ABSTRACT

Queuing theory can be used to predict some of the important parameters like total waiting time, average waiting time of patients, average queue length. The simulation of queuing system can be applied to many real-world applications. If it were possible to improve the queues, there would be more profits made and more time to carry out business than ever before, which would be very useful in this fast paced world. This paper describes the use of queuing systems to decrease the waiting time of patients.

## ARTICLE INFO

### Article History

Received: 28<sup>th</sup> February 2016

Received in revised form :

1<sup>st</sup> March 2016

Accepted: 3<sup>rd</sup> March 2016

Published online :

5<sup>th</sup> March 2016

## I. INTRODUCTION

Queue is a common word that means a waiting line or the act of joining a line. It is formed when the number of customers arriving is greater than the number of customers being served during a period of time. Long waiting list or waiting time in public health is a notorious problem in most of the countries all over the world. This paper describes the use of queuing systems to decrease the waiting time of patients. Patient flow is a complex phenomenon because of the random nature of the arrival and service of the patients. This requires a systematic approach in planning. Queuing theory and simulation are analytical techniques that are increasingly being accepted as valuable tools. Queuing systems are quicker to use however, they do not have the flexibility of simulation technique. It describes the inter arrival time and service time of the patients coming to the hospital with a suitable distribution. The primary inputs to these models are arrival and service patterns. These patterns are generally described by suitable random distribution. It is found that the inter arrival time of patients follows the Exponential distribution, and the service time follows Normal distribution. Queuing theory can be used to predict some of the important parameters like total waiting time, average waiting time of patients, average queue length. The queuing

system predicted the average waiting time of patients, average queue length, closer to the actual values. Queuing theory is a stochastic approach dealing with random input and servicing processes. As there is a phenomenological analogy between a queuing system and the systems in humans, the aim of the present study was to apply queuing theory with Monte Carlo simulation. Simulation is a mimic of reality that exists or is contemplated. Simulation is most effectively used as a stage in queuing analysis. The simulation is run for patients coming to department, the pertinent parameters like waiting time, service time, waiting time-service time ratio.

### Queuing Theory

Queuing Theory is mainly seen as a branch of applied probability theory. Its applications are in different fields, e.g. communication networks, computer systems, machine plants and so forth.

The Queuing Theory, also called the Waiting Line Theory, owes its development to A. K. Erlang's efforts to analyze telephone traffic congestion with view telephone traffic congestion with a view to satisfying the randomly arising demand for the services of the Copenhagen automatic telephone system, in the year 1909. The theory is used in

situations where the customers arrive at some ‘service stations’ for some service, wait (occasionally not), and then leave the system after getting the service. In such ‘arrival and departure’ problems, the customers might be people waiting to deposit their electricity bills at a cash counter, machines waiting to be repaired in a factory’s repair shop, aero planes waiting to land at an airport, patients in a hospital who need treatment and so on. The service stations in such problems are the cash counters in the electricity office, repairmen in the shop, runways at the airport and doctors attending the patients, respectively.

In general, a queue is formed at a queuing system when either customers (human beings or physical entities) requiring service wait due to number of customers exceeds the number of service facilities, or service facilities do not work efficiently and take more time than prescribed to serve a customer. The only way that the service demand can be met with ease is to increase the service capacity (and raising the efficiency of the existing capacity if possible) to the exiting level. The capacity might be built to such high level as can always meet the peak demand with no queues. But adding to capacity may be a costly affair and uneconomic after a stage because then it shall remain idle to varying degrees when there are no or few customers. A manager, therefore, has to decide on an appropriate level of service which is neither too low nor too high. Providing too low service would cause excessive waiting which has a cost in terms of customer frustration, loss of goodwill in the long run, direct cost of idle employees (where, for example, the employees have to wait near the store to obtain the supplies of materials, parts or tools needed for their work), or loss associated with poor employee morale resulting from being idle. On the other hand, too high a service level would result in very high set up cost and idle time for the service stations, thus, the goal of queuing modeling is the achievement of an economic balance between the cost of providing service and the cost associated with the wait required for that service.

Queuing Theory tries to answer questions like e.g. the mean waiting time in the queue, the mean system response time (waiting time in the queue plus service times), mean utilization of the service facility, distribution of the number of customers in the queue, distribution of the number of customers in the system and so forth. These questions are mainly investigated in a stochastic scenario, where e.g. the inter-arrival times of the customers or the service times are assumed to be random.

**Case Study: Overview of Process**

Daily, 70-80 patients (new and old) arrived in Chemotherapy section. It seen that, patients are waits in queue for a long time. Large Queue length seen in the Chemotherapy section. When the demand for a service exceeds the capacity of that service, waiting is unsurprising and inevitable. So this the large problems in the healthcare sector. Queuing systems theories have been used to study waiting time and predict the efficiency of services to be provided. In this department, problem is to be identified. Queuing theory and simulation technique is used and optimum resources used to reduced the average waiting time

**II. VALIDATION OF INTER ARRIVAL TIME AND SERVICE TIME PROBABILITY DISTRIBUTIONS**

hospital comprised of patients inter arrival times and service times. The data collected is for the Radio therapy section. The frequencies of patients are calculated and the distributions for this section is plotted on the graph with inter arrival time and frequency as an ordinate as follows.

**A) DISTRIBUTIONS FOR INTER ARRIVAL TIMES INTER ARRIVAL TIME PROBABILITY DISTRIBUTION FOR RADIO THERAPY SECTION :**

The inter arrival time of patients visited the Radio therapy section for 3 days is recorded and the frequency at fixed values of inter arrival times is calculated data collected as shown in the table 2.1. The graph is plotted between the inter arrival times and frequency of patients visited. The curve obtained resembles to the standard exponential probability distribution curve as shown in the fig. 2.1. Hence it can be concluded that the inter arrival time for chemo therapy section follows the exponential curve. It can be observed that highest frequency 138 is at the 6 min. inter arrival time. But at 4 min of inter arrival time, the frequency is 64 (red point in fig. 2.1.), this recorded data somewhat deviates the distribution curve from the exact exponential curve. Except this 4 min. frequency 64, all other data fits to exponential distribution as shown in the fig. 2.1. from 138, gradually the frequency goes down approximately exponentially towards the lowest value 2 at the inter arrival time of 14 min. hence it can be predicted that the most of the time the patients come frequently with interval of 6 min. This kind of frequency may lead for high waiting time.

Table 2.1. Inter arrival time and frequency of patients for Radio Therapy section.

Inter Arrival Time (min.)	Frequency
4	64
6	138
8	34
10	14
12	2
14	2

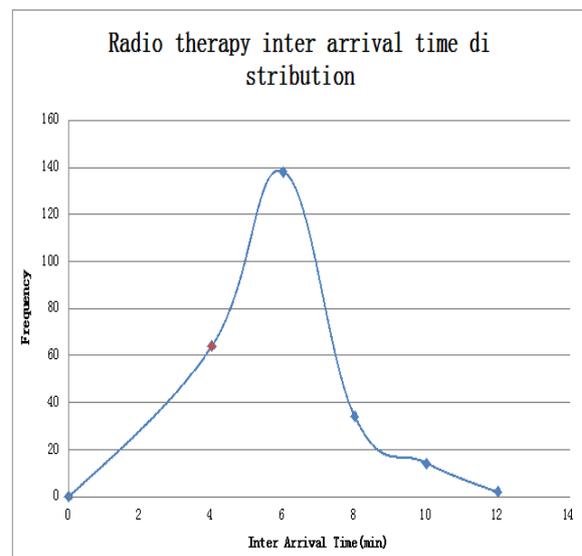


Fig 2.1. The inter arrival time distribution for Radio Therapy section.

**A) DISTRIBUTIONS FOR SERVICE TIMES  
SERVICE TIME PROBABILITY  
DISTRIBUTION FOR RADIO THERAPY  
SECTION :**

The service time of patients visited to the Radio therapy section for 3 days is recorded and the frequency at fixed values of service times is calculated data collected as shown in the table 2.2 The graph is plotted between the service times and frequency of patients visited. The curve obtained resembles to the standard normal probability distribution curve as shown in the fig. 2.2. Hence it can be concluded that the service time for Radio therapy section follows the Normal distribution.

Table 2.2 Service time and frequency of patients for Radio Therapy section

Service Time (min.)	Frequency
2	1
4	102
6	130
8	14
10	6
12	2

It can be observed that highest frequency 130 is at the 6 min. service time. In the curve, gradually the frequency goes up and then down. It can be predicted that the most of the time the patients come frequently with service time of 6 min.

**This kind of frequency may lead for high waiting time.**

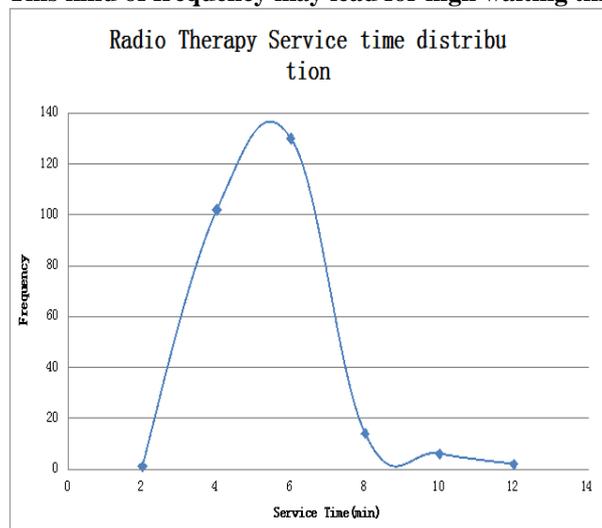


Fig 2.2 The service time distribution for Radio therapy section.

In all above mentioned sections the inter arrival time and service time distributions have been discussed in details. After identifying the probability distributions the patient's arrival and service time behavior can be predicted and the whole system can be simulated to find out the average waiting time by simulating the much more number of patients.

**III. CALCULATIONS OF AVERAGE WAITING TIME FOR RADIO THERAPY SECTION USING THE SIMULATION OF PATIENTS**

**A) AVERAGE WAITING TIME FOR RADIO THERAPY SECTION WITH PRESENTLY AVAILABLE MACHINE :**

The first frequencies are calculated for each inter arrival time and probabilities are calculated by dividing the each frequency by total frequency. The cumulative frequency is calculated as shown in the table 3.1.

Distribution of Inter-Arrival Time					Distribution of Service Time				
Inter Arrival Time	Frequency	Prob.	Cum. Prob.	Random No.	Service Time	Frequency	Prob.	Cum. Prob.	Random No.
00-20	1	0.0021	0.0021	00-20	4	3	0.36	0.36	00-35
20-40	102	0.021	0.0231	21-80	6	4	0.56	0.92	36-91
40-60	130	0.026	0.0491	81-95	8	5	0.06	0.98	92-97
60-80	14	0.00028	0.0519	96-97	10	1	0.01	0.99	98
80-100	6	0.00006	0.0525	98	12	1	0.01	1	99
100-120	2	0.00002	0.0527	99	14	1	0.01	1	100
120-140	1	0.00001	0.0528			8			
						3			
						1			

The simulation is done for 83 patients (1 day) for the Radio therapy section by using the MATLAB program. Random numbers are generated and the interval is identified for the generated random number and accordingly the inter arrival time of the patient is decided same is done for the service time. Presently the 1 machine is available for providing the services. The assignment of patient to the machine is done by checking the availability of machine for next patient. Then the waiting time for each patient is calculated and average waiting time is determined. The average waiting time for Radio therapy patients is 7.09 min. and the average service time calculated is 13.38 min.

**A) AVERAGE WAITING TIME FOR RADIO THERAPY SECTION WITH ONE EXTRA MACHINE.**

In order to reduce the average waiting time of patients' one extra machine is made available virtually in the MATLAB program and the waiting time calculations are done according the stated procedure in the last chapter. It can be identified that addition of one machine to Radio therapy

section has reduced down the 0 min. This indicates that the addition of a machine has reduced down the waiting time to zero i.e. no waiting at all.

**IV.RESULTS AND DISCUSSION :RESULTS DISCUSSION FOR RADIO THERPY SECTION**

The calculations done for the Radio therapy section with single machine (present) and 2 machines (proposed) indicate that the addition of one more machine has reduced the average waiting time from 7.09 min to 0 min i.e. no waiting time at all. From fig. 4.1 and 4.2 it can be concluded that the peak waiting time is 22 min when single machine is available and its 0 min when 2 machines are available. Hence in the fig 10.5, the waiting time line is at zero level.

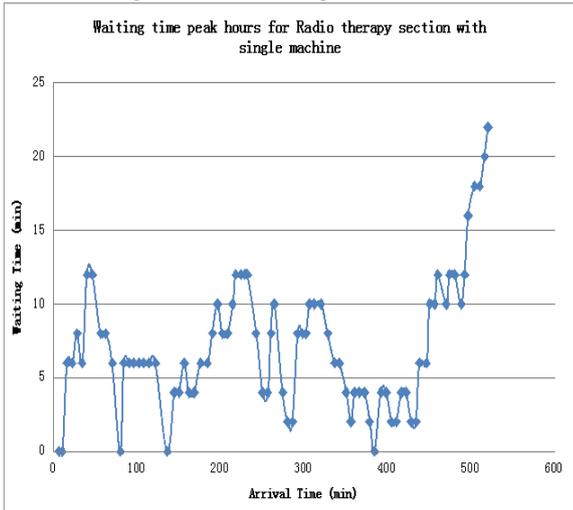


Fig 4.1. Waiting time peak hours for Radio therapy section with single machine

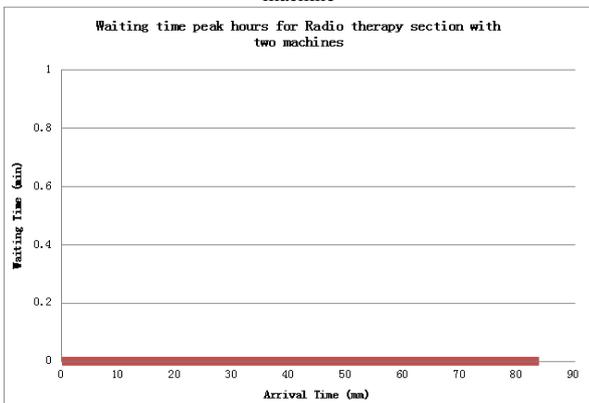


Fig 4.2. Waiting time peak hours for Radio therapy section with two machines

**V.CONCLUSION**

average waiting time of patients for each section in the radiation therapy and oncology department. The probability distributions for patient’s arrival time and service time for radiotherapy section have been calculated from the data collected and the average waiting time for the present resources quantity and availability has been calculated by simulating the number of patients using MATLAB program. Then the extra resources are added e.g. one machine is added to Radio therapy section. After adding the resources again the average waiting time has been calculated for sections with extra resources. The objective is achieved by reducing the average waiting times of the section as shown

in the table 5.1 and fig 5.1. by allocating the extra resources as shown in the table 5.2 and fig. 5.2

Table 5.1 Comparison of average waiting time for each section before and after the allocation of extra resources.

Sr. No	Sections in Department	Waiting Time (min)		
		Before Allocation of Extra resources	After Allocation of Extra Resources	% Reduced
1	Radio Therapy	7.09	0	100

Table 5.2 Comparison of allocation of resources for each section before and after the allocation of extra resources.

Sr. No	Sections in Department	Allocation of extra resources		
		Before Allocation of Extra resources	After Allocation of Extra Resources	% Increase in resources
1	Radio Therapy	1 machine	2 machines	100

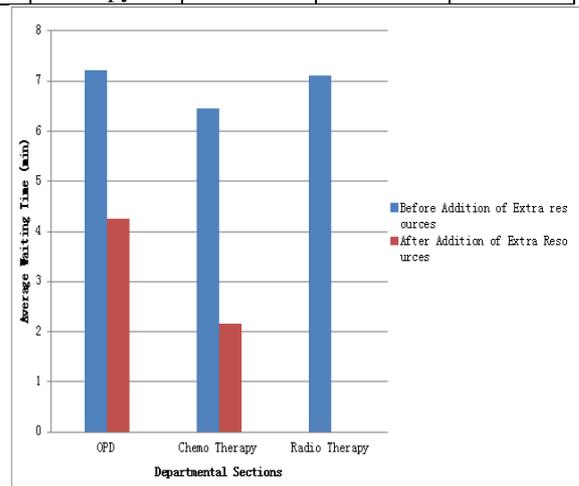


Fig 5.1 Comparison of average waiting time for each section before and after the allocation of extra resources

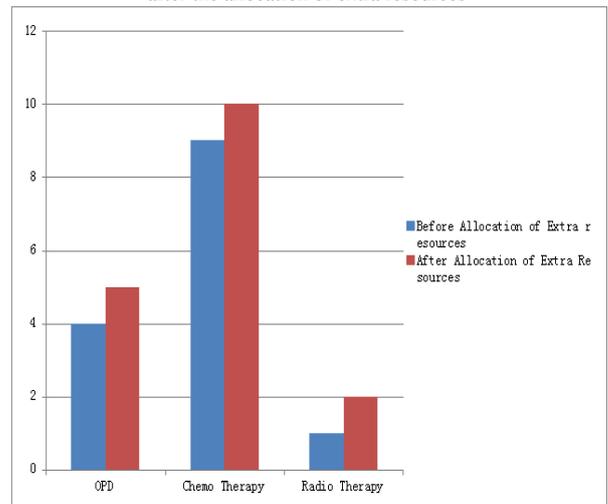


Fig 5.2 Comparison of allocation of resources for each section before and after the allocation of extra resources

Form the above figures and tables following points can be concluded.

1. The average waiting time for Radio therapy section is reduced by 100 if one more machine is added to the section.

and Communication (IJRITCC), vol 3 issue 2, Feb 2015, ISSN 2321-8169.

### REFERENCES

[1].Professor Edward Anderson, A Note on Managing Waiting Lines , UT McCombs School of Business.

[2].Sanish A. (June 2007) Application Of Queuing Model And Simulation To The Traffic At New Mangalore Port , Department of Applied Mechanics and Hydraulics, NITK Surathkal. Karnataka.

[3].Fatima Yousef Abdalla Barham, (2008), Simulation in Queuing Models: Using Simulation at Beit-eba crossing check-point, Faculty of Graduate Studies at An-Najah National University, Nablus, Palestine.

[4].Wijewickrama A. K. , Int.j.simul.model 5(2006)2, 56-68, Simulation Analysis For Reducing Queues In Mixed-Patient's Outpatient Department., Nagoya University, graduate School of Economics & Business Administration, Furo-cho, Nagoya, Japan.

[5].Susan L. Albin, Jeffrey Barrett, David Ito And John E. Mueller, (1990), A Queuing Network Analysis Of A Health Center, Department of Industrial Engineering, Rutgers University, Piscataway, NJ 08855-0909, USA.

[6]. Samuel Fomundam, JeffreyHerrmann,(2007), A Survey of Queuing Theory Applications in Healthcare, ISR Technical Report 2007-24 , The Institute for Systems Research.

[7].Sachin Jayaswal & Gaurav Chhabra, (2005), Simulation Study of an Inbound Call Center, Department of Management Sciences, University of Waterloo.

[8].Igor Georgievskiy, Zhanna Georgievskaya, William Pinney (Alcorn State University) Donald McWilliams (Texas Wesleyan University), Using Queuing Analysis And Computer Simulation Modeling To Reduce Waiting Time In The Hospital Admitting Department.

[9].Ozcan, Y.A., (2006), Firs edition, Jossey -Bass Publications, 2006.Quantitative Methods In Health Care Management; Techniques And Applications.

[10].Pieter Tjerk de Boer, geboren op 18 januari 1972 te Wildervank (gem. Veendam), Analysis and efficient simulation queuing models of Telecommunication Systems.

[11].Ishan P. Lade., (2013),.Simulation of Queuing analysis in hospital, International Journal of Mechanical Engineering and Robotic Research (IJMERR), Vol 2 No 3, July 2013, ISSN 2278-0149.

[12].Ishan P. Lade., (2015), Reduction of waiting time by using simulation & Queuing, analysis, International Journal on Recent and Innovation Trends in Computing