



# Modelling, simulation and optimization of deep-draw ncup-cone assembly

#<sup>1</sup>Vishal S Pund

<sup>1</sup>pund.vishal@gmail.com

#<sup>1</sup>Department of Mechanical Engineering, D. Y. Patil college of Engineering, Akurdi, Pune, Maharashtra, India.

## ABSTRACT

In present innovative and fast developing industries it is necessary to deliver best product with high quality, good productivity and optimum cost. All sheet metal forming processes result in permanent plastic deformation changing material properties and hence it is necessary to find the limit to which a material can further be deformed for further forming operations. Traditionally, experimental trial and error methods are used which include adjustment of settings (geometry, loadings, tool direction) accordingly. However, this method is time consuming and is dependent on the experience of the tool designer. To overcome these shortcomings, sheet metal forming simulations have been used instead. This paper highlights development of 'draw' component and the changes made in product design due to manufacturing and assembly reasons considering the design intent; and also the advantages of using Simulation software for deep draw process. Deep drawing process was independently modelled using CATIA V5 and simulated using HYPERFORM. The workpiece material used was steel alloy. For whole simulation process, the punch and die were considered to be rigid bodies made from alloy steel. Deep Draw Simulation was carried out. The critical areas on the workpiece were identified and then optimized as per design conditions. The results obtained using simulations were in good agreement with the experimental results. Thus results help to reduce cost and manpower required during proto phase as all modifications were carried during design and development phase.

**Keywords—** Deep Draw, formability, simulation, sheetmetal, optimization

## ARTICLE INFO

### Article History

Received : 18<sup>th</sup> November 2015

Received in revised form :

19<sup>th</sup> November 2015

Accepted : 21<sup>st</sup> November , 2015

Published online :

22<sup>nd</sup> November 2015

## I. INTRODUCTION

Sheet metal forming is mostly used manufacturing method in industry that is used to change the geometry of sheet metal of typically about 1.5-2 mm thickness without loss of material. The purpose of sheetmetal forming processes is basically to produce a required shape by plastic deformation. The final part quality is dependent on both the sheet material property and process variables. These variables are dependent on the tool and die design, blank geometry, properties of the lubricant used (such as 13 coefficient of friction and heat capacity) and drawing speed. A deviation in product shape can result due to incorrect combinations of these process parameters. A change in shape is usually caused by elastic spring back of the part after forming and retracting the tool.

It is therefore important to have a good knowledge of the influence of all variables on sheet metal forming process in general and on the deep drawing process in this work, if a proper tool design is to be achieved. Design approach with simulation have been used for forming processes. Using similar approach, a full process modelling and simulation was undertaken in the present work. While FEA serves well for die design and optimisation, it faces unique challenge for process design and optimization for each particular product. Suggestions have been made that at the product development stage, it is possible to model and analyse the whole production process before physical prototyping. With FEA all possible flaws in the production line can be identified and corrected at the design stage. It is necessary to determine the stress/strain state of the sheet metal at every

forming stage for easy assessment of formability or work hardening of the material.

The main objective of this research was to accurately simulate and optimize the deep drawing process of sheet metal, specifically. This was expected to enable tool designers to numerically evaluate the sheet metal forming tool and process design and to then enable redesign where necessary in order to meet the requirements of producing desired shapes using deep draw processes.

**A. Deep Draw Process.**

Deep drawn products in modern industries usually have complicated shapes that require several successive operations to be achieved. The first process that a sheet metal undergoes is usually blanking, the shaping of the sheet metal to optimal size which is followed by the deep drawing process, after which trimming of the resulting flange is done in order to remove the extra material from it to ensure uniformity of the flange shape on all sides of the final product. This extra material is often wavy or uneven formed along the edge of the flange or end of the wall of the cup. This is result of uneven metal flow from different directions, which is due to the presence of planar anisotropy in the sheet. Die design for a full deep drawing production line becomes a challenge if a lengthy and expensive prototype testing and experimentation is used in arriving at a final competitive product.

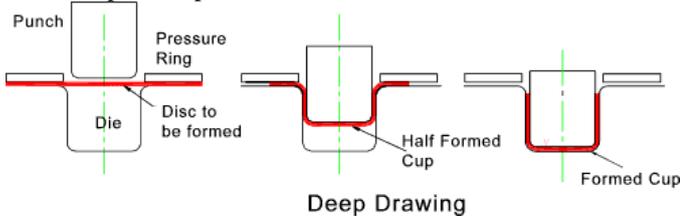


Fig. 1 Deep Drawing

**II. PROBLEM STATEMENT**

Development of form component is very costly process and it will take lot of time if we work traditionally. For this we can use latest technology such as simulation and analysis during the design phase. This helps to solve errors in forming by easily pointing out through analysis results which will save our work, time and cost. Based on the analysis report tool designer can suggest revisions/ changes in the product design which will help tool designer to design a tool which produce defect free components depending on the given inputs. Without this technique the die design and the processing could be costly and complicated project. As shown in Figure 2, draw Component may face challenges such as, Wrinkling, Tearing, Thinning, Spring-back. The challenge is to capture these defects in initial stages and rectify them before the actual tryouts in order to produce cost effective component.



Fig. 2 Defects in forming

**III. LITERATURE REVIEW**

Literature review is sorted on the basis of the parameters and functions which control forming process. The important parameters and functions are:

- a. Blank holder force
- b. Punch velocity and punch force
- c. Forming Limits
- d. Blank shape
- e. Stress and Strain Distribution
- f. Thickness variation
- g. Wrinkling

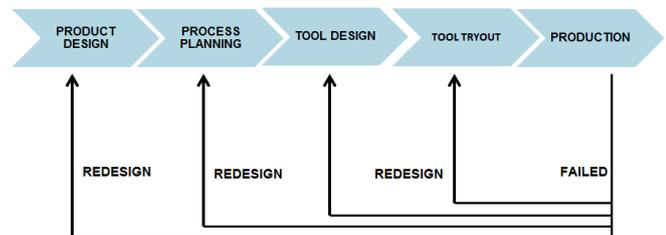


Fig.3 Traditional Process

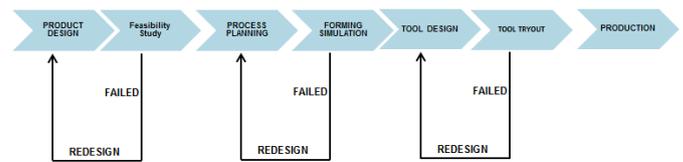


Fig. 4 Conventional Process

As shown the traditional process and effective conventional process can be shown as shown in the fig3 and fig4

**IV. ASSEMBLY MODELLING**

A 3-D deep drawing process was modelled using modelling software CATIA V5 as shown in Fig5. The actual part was closed shaped like tube. Hence it was initially cut in two parts. The two sides were to be drawn from single blank. 3D was created keeping this concept in mind as shown in fig 6.

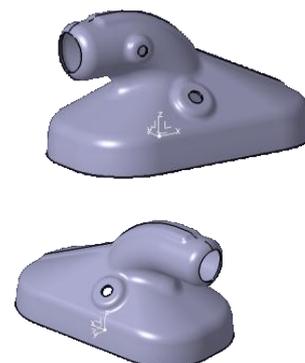


Fig. 5. Actual Part in CATIA

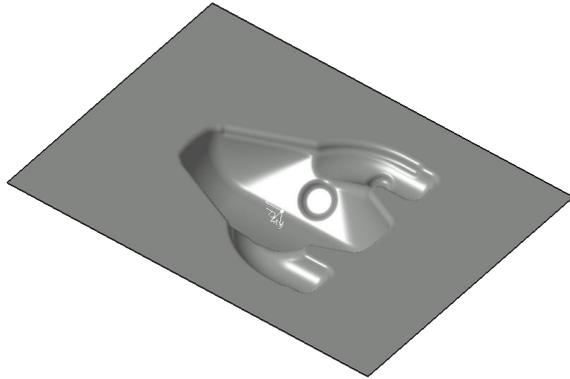
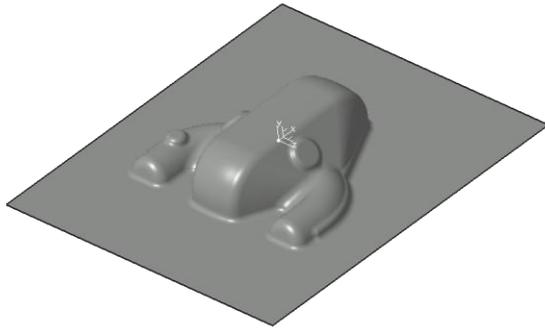


Fig.6. Blank Concept in CATIA

**V.MATERIAL PROPERTIES**

The Material Properties which are Important with respect to the Radial Fatigue Test Simulation are displayed below.

**Table 2: Properties of the Material of the Wheel**

Properties	Sample 1	Sample 2
Thickness(mm)	1.5	2.0
Ultimate load (KN)	15.3	22.77
Yield Stress(N/mm <sup>2</sup> )	284.42	354.15
Tensile Strength(N/mm <sup>2</sup> )	464.67	555.37
% elongation	29.12	27.5

**VI.MESHING & SIMULATION PROCESS**

Deep drawing process is characterized by a large number of process parameters and their interdependence. These are material properties, machine parameters such as tool and die geometry, workpiece geometry and working conditions. The drawing force can be determined by the empirical formula [Sharma, 2003]:

$F = A x s y \{ ( D/d) - C \}$  .....Equation  
Where,

D= blank diameter,  
d = shell diameter,  
y s = yield stress of the material and  
c = 0.6 .

The drawing ratio D/d takes into account the relation between the blank and the shell diameters. The drawing ratio depends on factors such as type of material and amount of friction present. The usual range of the maximum drawing ratio for mild steel is 1.6 to 2.3. The constant C accounts for friction and bending effects and ranges from 0.6 to 0.7 [Sharma, 2003].

**VII.SIMULATION RESULT**

Following results were obtained for first Trial

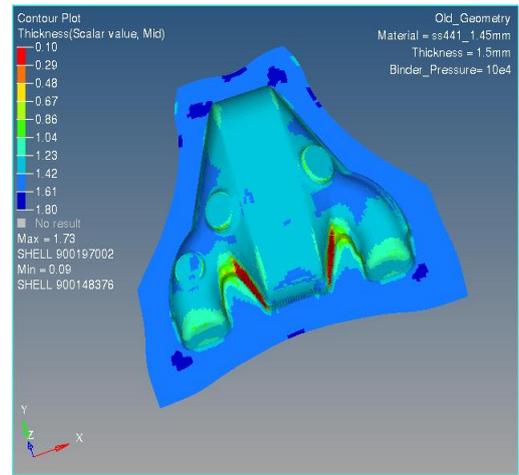


Fig.7 Thickness simulation

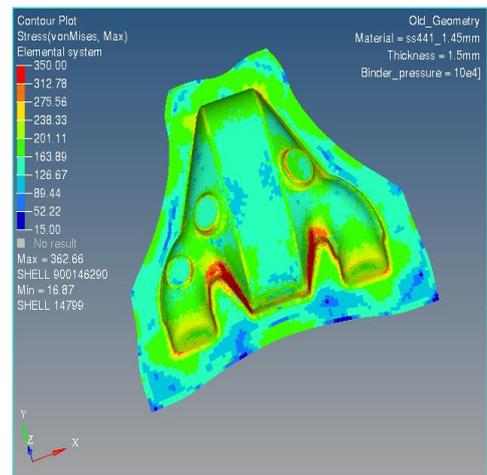


Fig.8 Stress simulation

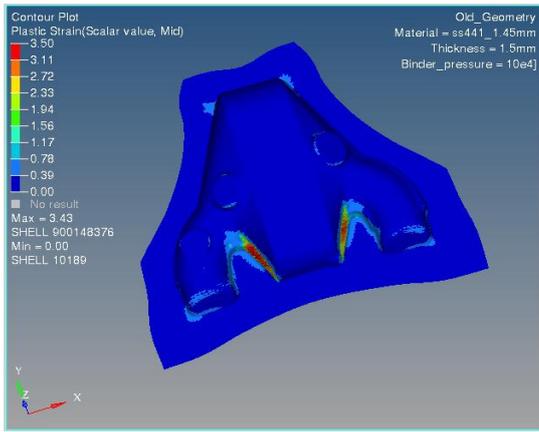


Fig.9 Plastic Strain simulation

**VIII. PHYSICAL TRYOUT**

Trial 1



(a)



(b)



(c)

Fig.10 Defect in actual tryout component

**IX. FINAL RESULT COMPARISON**

Thus by following the Simulation process and using optimization method it is expected that we get final results with defect free component. Also the software results must be in conformity with actual tryout results thus increasing the trustworthiness of the software

**X. CONCLUSION**

This was an attempt has been made to simulate the deep draw process for given sheet metal alloy. It was observed that, the results of simulation and actual tryout were similar. Thus if we have adequate inputs for the software the result can be trusted for complicated components without physical tryouts. Thus we can save the cost involved in proto phase. Simulations can be carried out for many combinations. By changing different variables we can finally achieve the best combinations considering design and manufacturing feasibility.

**REFERENCES**

1. Mathews Kaonga, "SIMULATION AND OPTIMISATION OF A FULL DEEP DRAWING PROCESS", ME Thesis, The University of Zambia, October 2009
2. Chandra Pal Singh<sup>1</sup>, Geeta Agnihotri<sup>2</sup>, Research Scholar, Mechanical Engineering, MANIT BHOPAL<sup>1</sup>, Professor, Mechanical Engineering, MANIT BHOPAL<sup>2</sup>, "Study of Deep Drawing Process Parameters: A Review" International Journal of Scientific and Research Publications, Volume 5, Issue 2, February 2015
3. R. Hambli, "Design of Experiment Based Analysis for Sheet Metal Blanking Processes Optimisation" Int J Adv Manuf Technol (2002) 19:403-10 Ownership and Copyright, Springer-Verlag London Ltd 2002
4. E.J. Obermeyer, S.A. Majlessi, A review of recent advances in the application of blank-holder force towards improving the forming limits of sheet metal parts, Journal of Materials Processing Technology 75 (1998) pp 222-234.
5. Altair HyperWorks Students Manual
6. David A Smith, Die Design Handbook, Society of manufacturing Engineers
7. Chung, S. Y., and Swift, H. W., "Cup Drawing from a Flat Blank," Proc. Of the Institute of Mechanical Engineers," Vol. 165, 1951, pp. 193-223.
8. Arwidson, C., "Numerical Simulation of Sheet Metal Forming", Lulea University of Technology, PhD Thesis 2005.
9. J. Wang, R.H. Wagoner, A Practical Large Strain Solid Finite element for sheet forming, International Journal for Numerical Methods in Engineering 63 (2005) 473-501.
10. J.H. Lee, B.S. Chun, Investigation on the variation of deep drawability of STS304 using FEM simulations, Journal of Materials Processing Technology 159/3 (2005) 389-396.
11. F.K. Chen, T.B. Huang, C.K. Chang, Deep drawing of square cups with magnesium alloy AZ31 sheets, International Journal of Machine Tools and Manufacture 43/15 (2003) 1553-1559.

12. M.P. Miles, J.L. Siles, R.H. Wagoner, K. Narasimhan, *A better sheet formability test*, Metallurgical and Materials Transactions A 24 (1993) 1143-1151.
13. N.A. Maslennikov, *Russian developed punchless drawing*, Metalwork Productions 16 (1957) 1417-1420.
14. A.M. Prior, *Applications of Implicit and explicit Finite Element Techniques to metal forming*, Journal of Materials Processing Technology 45 (1994) 649-656.
15. Y.T. Keum, R.H. Wagoner, J.K. Lee, *Friction model for FEM simulation of sheet metal forming operations (N328)*, Proceedings of the 8th International Conference "Numerical Methods in Industrial Forming Processes" NUMIFORM 2004, Columbus, 2004, 989-994.
16. E. Daxin, T. Mizunob, L. Zhiguo, *Stress analysis of rectangular cup drawing*, Journal of Materials Processing Technology 205/1-3 (2008) 469-476.