

Friction & Wear Monitoring of Sintered Spherical Iron Bush



^{#1}Prashant A. Kande

¹pkande8@gmail.com

¹Mechanical Engineering,SSPU

ABSTRACT

In recent years use of powder metallurgy is drastically increased. It is used in the automobiles and home appliances for weight reduction, better performance, improved characteristics and efficiencies. The PM parts such as bushes, bearings, pinions, sprockets, gears, pulleys are replacing the forging parts. These parts are used in the various applications and need the required density, hardness, wear resistance, friction resistance for the reliability in terms of the life of the parts.

Keywords— Powder metallurgy, Sintering, Wear and friction, Radiator fan motor bearings

ARTICLE INFO

Article History

Received :18th November 2015

Received in revised form :

19th November 2015

Accepted : 21st November , 2015

Published online :

22nd November 2015

I. INTRODUCTION

The radiator is an important accessory of vehicle engine. Normally, it is used as a cooling system of the engine and generally water is the heat transfer medium .For this liquid-cooled system, the waste heat is removed via the circulating coolant surrounding the devices or entering the cooling channels in devices. The coolant is propelled by pumps and the heat is carried away mainly by heat exchangers. Continuous technological development in automotive industries has increased the demand for high efficiency engines. A high efficiency engine is not only based on its performance but also for better fuel economy and less emission. Reducing a vehicle weight by optimizing design and size of a radiator is a necessity for making the world green. Addition of fins is one of the approaches to increase the cooling rate of the radiator. It provides greater heat transfer area and enhances the air convective heat transfer coefficient.[1] However, a bearing of radiator fan plays an important role in an efficiency of a radiator. So there is scope for an improvement in bearing material for higher wear resistant and frictional properties.

II. PROBLEM DEIFINITION

Existing bush is wearing out and not sustaining to an expected life, so we need to change the material composition to get better wear resistance.

A. DESCRIPTION

Friction and wear always occur at machine parts which run together. This affects the efficiency of machines negatively.

Sintered spherical iron bushes are expected to have several properties such as low friction coefficient, high load capacity, high heat conductivity, high wear and corrosion resistance.

III. AIMS AND OBJECTIVES

- A. To improve the wear resistance of the sintered spherical iron bushes
- B. To reduce the coefficient of friction
- C. To analyse the effect of various speeds, loads and time on wear of bush.
- D. Making improved materials by changing material composition

TABLE I
SINTERED IRON MATERIALS

Sr. No.	Material Composition (%)					
	Iron	graphite	JB Wax	MNS	Cu	Zn Sterate
1	90	0	0.8	0	10	0
2	89.2	0.5	0.2	0.3	10	0.6

IV. MANUFACTURING PROCESS OF SINTERED SPHERICAL BUSH



Fig 1 : manufacturing process of sintered spherical bush

A. APPLICATIONS OF SPHERICAL BUSH:

Spherical bushes are used in motors of home appliances as well industrial applications such as mixer, grinder, fan, desert coolers to guide the motor shaft in the motor housing.

B. METHODOLOGY:

- Finding out the materials for the practical applications of the cylindrical bushes.
- Inspecting the microstructure of the materials
- Making testing pins (Ø 12 x 25 mm) by compaction
- Sintering at the appropriate conditions and belt speeds
- Inspecting for cracks, pores and microstructures
- Checking hardness for sintering testing pin
- Take trials on the Friction and Wear monitoring setup at various sliding velocities
- Data collection
- Data Analysis
- Addition/deductions in the material composition for better results in terms of friction and wear rates
- Repeating above procedure Comparing the before and after data
- Noting the results of practical application in terms of strength, PV factor, temperatures, wear rate, friction rate
- Data analysis
- Using the improved material composition for practical application

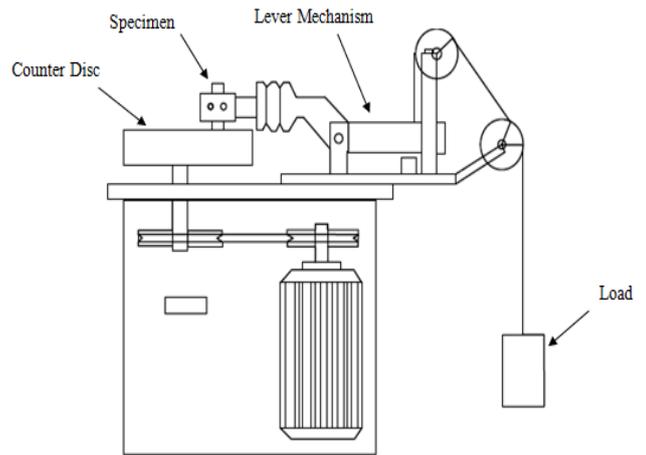


Fig 2 : Experimental setup for Friction and Wear Monitoring



Fig 3 : Testing apparatus pin and disc

V. COMPARISON OF WEAR AND FRICTION PROPERTIES

The material stated in table 1, were tested on Friction and Wear Monitor. The mating part for bearing in radiator is shaft

of EN8 grade. So the material of the disk is chosen as EN8. The pin and disk used in the testing are as shown in the figure 3. The specification of the radiator fan motor is as follows :

TABLE III
Radiator fan motor specifications

Sr. No.	Parameter	Description
1	Application	Automotive radiator cooling fan
2	Rated Capacity	160 W
3	Outer Dia	385 mm
4	Voltage	12 V

Calculations:

$$\text{Sliding Velocity} = (D N) / 60$$

Data from motor specification :

Diameter of Shaft : 8 mm

RPM : 3300

$$V = 1381.6 \text{ mm / sec}$$

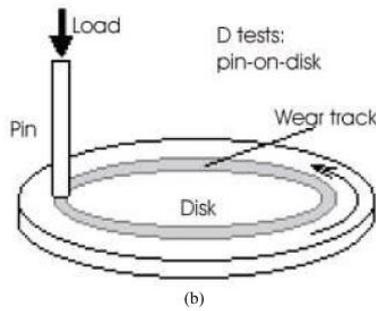


Fig 4 : Geomtric configuration of the tribosystems used in the sliding tests.

TABLE III



TESTING PARAMETERS FOR WEAR AND FRICTION MONITOR

Testing Parameters			
Sr. No.	Sliding Velocity (mm/Sec)	Disk Diameter	Disk RPM
1	1381.6	20	1320
2		40	660
3		60	440
4		80	330
5		100	264
6		120	220



A. Graphical Results :

Using Friction and Wear monitor, we get the graphical results in terms of time Vs. wear/coefficient of friction/frictional force for both materials as follows.


I. Wear Rate of Material 1

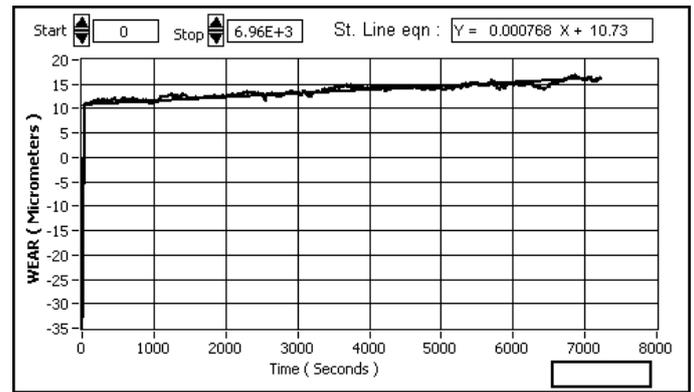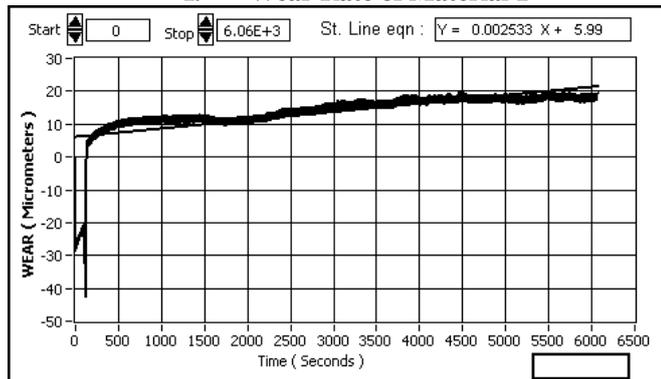


II. Coefficient of friction of Material 1 :

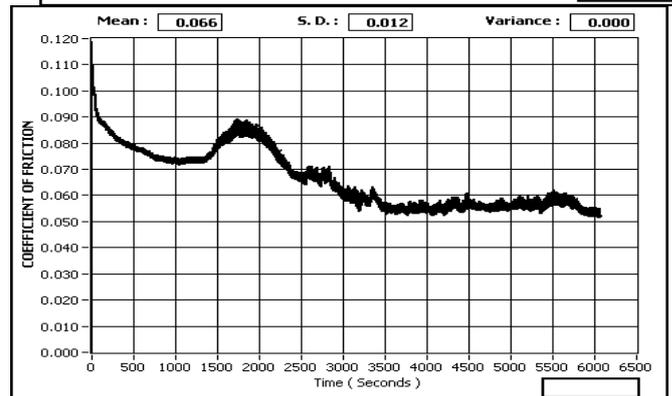
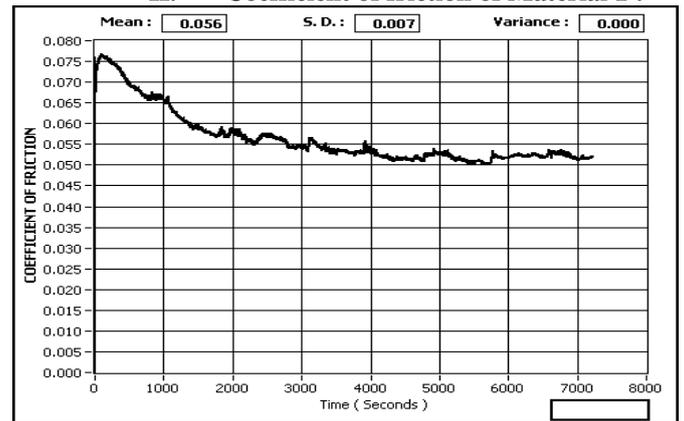


III. Wear Rate of Material 2 :

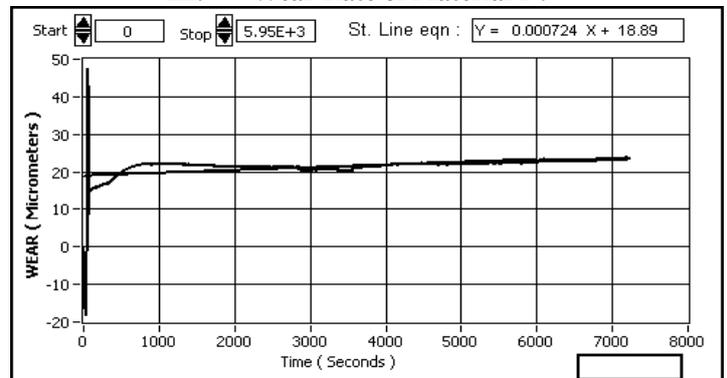

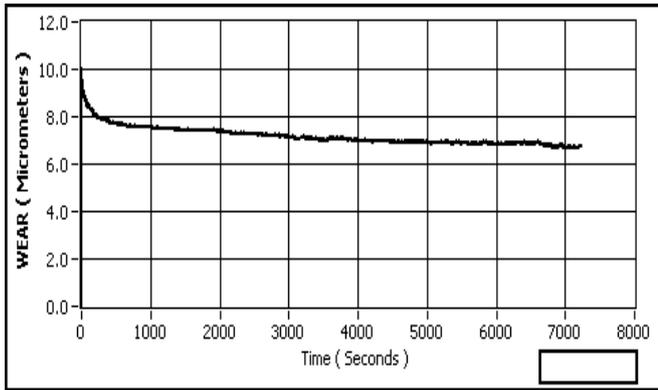

IV. Coefficient of friction of Material 2 :

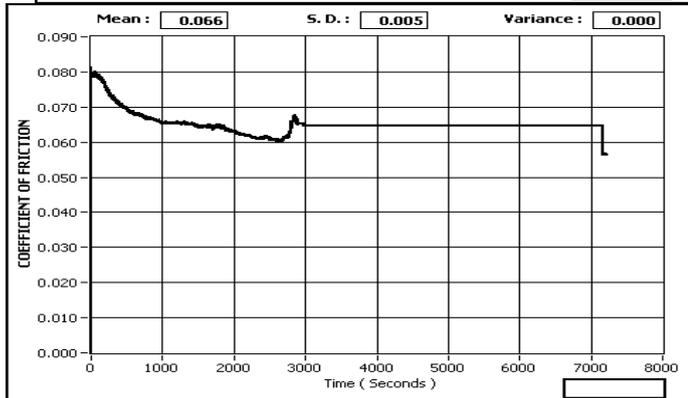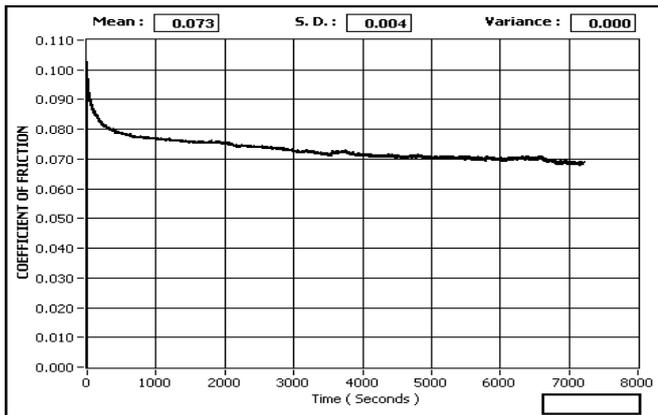

VI. CONCLUSIONS

The experiments were successfully conducted on the wear and friction monitor of DUCOM Industries bangalore. The regular material with 90 % Fe, 10 % Cu used and testing pins made at the 1100° C and 150 mm/min belt speed. The improved material made with the same procedure and added 0.5 graphite, 0.6 zinc sterate. It was observed that the material with graphite and zinc sterate improves the wear resistance after stability. Also improved material gives better coefficient of friction than earlier material.

A specimen pin model was developed to predict the wear phenomenon. The model developed predicted the wear so well. It was observed that the improved material increased as the percentage wear resistance increased. It was also observed that the temperature stability of the specimen pin of an improved material developed agreed with the experimental results.

ACKNOWLEDGEMENT

Thanks to Prof. R.R. Navthar for his valuable contribution in developing the new composition for sintered spherical iron bush.

REFERENCES

- [1] D.P. Kulkarni, R.S. Vajjha, D.K. Das, D. Oliva, Application of aluminum oxide nanofluids in diesel electric generator as jacket water coolant, Applied Thermal Engineering 28 (14-15) (2008) 1774-1781.
- [2] Bhushan, principles and applications of Tribology
- [3] Paulo D 2000 J. Mater. Porc. Technol. 100273 (2000)
- [4] Prasad B.K. 1997 Metal Trans 28 809 (1997)
- [5] Backensto A B 1990 Effect of lubricants on the properties of copper-tin powder and compacts, Advances in P/M conf. N. Jersey, pp 303-314 (1990)
- [6] Upadhyaya A N, Mishra S and ojha S N 1997 J. Mater. Science 323227 (1997)
- [7] Prasad B K. Dry Sliding wear response of some bearing alloys as influenced by the nature of micro constituents and sliding conditions