

International Engineering Research Journal

Heat Transfer Enhancement over Dimpled surface on one side of plate by Experimental Analysis

Avinash A. Ranaware[†], Prof. I. H. Patel[‡]

[†]ME Student, Department of Mechanical Engineering, G.S. Moze College of Engineering, Balewadi, Pune, India.

[‡]Assistant Professor, Department of Mechanical Engineering, SVPM's College of Engineering, Malegaon (Bk), Baramati, India.

Abstract

Many researchers investigate heat transfer enhancement on dimpled surface. Dimples are used on the surface of internal flow passages because they produce substantial heat transfer augmentation. This project work is concerned with experimental investigation of the forced convection heat transfer over the dimpled surface. The experimental analysis objective is to find out the heat transfer and air flow distribution on dimpled surfaces and all the results obtained are compared with those from a flat surface. The varying parameters were i) Dimple arrangement on the plate i.e. staggered and inline arrangement and ii) Heat input iii) Dimple density on the plate. Heat transfer coefficients and Nusselt number were measured in a channel with one side dimpled surface. The spherical and conical type dimples were fabricated, and the diameter and the depth of dimple were 6 mm and 3 mm, respectively. Channel height is 25.4mm, two dimple configurations with inline and staggered arrangement were tested. The Reynolds number based on the channel hydraulic diameter was varied from 2000 to 8500. Study shown that increase with Reynolds number, thermal performance also increases. With the inline and staggered dimple arrangement for spherical and conical arrangements, the heat transfer coefficients, Nusselt number and the thermal performance factors were higher for the conical staggered arrangement.

Keywords: Heat Transfer Coefficient; Nusselt number; Reynolds Number.

1. Introduction

The heat transfer enhancement increase by the use of dimple on the surface. Some typical examples for use of dimples for heat transfer enhancement are turbine blade cooling, tube heat exchangers in chemical and textile industries, car radiators and on no. of electronic devices like CPU, LED/LCD Monitors etc. Further concept for reduction in thermal resistance and consequent enhancement in heat transfer is to increase the depth of the dimples. Introducing the dimples on the surface not only increase the surface area available for heat transfer but also reduces the hydrodynamic resistance for the fluid flow over the surface, resulting in less pressure drop. Thinning and disturb in thermal boundary layer because of vortices formed inside the dimple. formed over the surface during coolant flow and serve ultimately to bring about enhancement of heat transfer between the fluid and its neighboring surface at the price of less increase in pressure.

2. Literature Review :

Moon et. al. [1] studied the channel height effect on heat transfer over the dimpled surfaces. Heat transfer coefficient and friction factors were computationally investigated in rectangular channels, which had dimples on one wall. The heat transfer coefficients were calculated for relative channel heights (H/D ratio of 0.37, 0.74, 1.11 and 1.49) in a Reynolds number range from 12,000 to 60,000. The heat transfer enhancement was reported mostly outside of the dimples. The heat transfer enhancement was lowest on the upstream dimpled wall and highest in the vicinity of the downstream rim (edge) of the dimple. The heat

transfer coefficient distribution exhibited a similar pattern throughout the studied H/D range ($0.37 < H/D < 1.49$).

Patel and Borse [2] have experimentally investigated the forced convection heat transfer over the dimpled surface. The objective of the experiment is to find out the heat transfer and air flow distribution on dimpled surfaces and all the results obtained are compared with those from a flat surface. The results showed that use of dimples on the surface results in heat transfer augmentation in forced convection heat transfer with lesser pressure drop penalty and the value of maximum Nusselt number obtained for staggered arrangement of dimples is greater than that for inline arrangement, keeping all other parameters constant.

Kueth[3] was the first one to suggest using surface dimples for heat transfer enhancement. Surface dimples are expected to promote turbulent mixing in the flow and enhance the heat transfer, as they behave as a vortex generator.

Mahmood et.al. [4] investigated the effect of dimples on local heat transfer and flow structure over a dimpled channel. Experimental results obtained on and above a dimpled test surface placed on one wall of a channel were given for Reynolds number varying from 1250 to 61500. These include flow visualizations, stream wise velocity and local Nusselt numbers. The H/D ratio was kept constant as 0.5. They reported that the flow visualizations show vortical fluid and vortex pairs shed from the dimples, including a large upwash region and packets of fluid emanating from the central regions of each dimple, as well as vortex pairs and vortical fluid

that form near dimple diagonals. These vortex structures augment local Nusselt numbers near the downstream rims of each dimple, both slightly within each depression, and especially on the flat surface just downstream of each dimple. The results also showed that as the ratio of inlet to wall temperature decreases, the coolest part of the test surface which corresponds to the highest value of baseline Nusselt number ratio (Nu/Nu_0) intensifies and extends farther away from the downstream rims of the dimples.

Mahmood and Ligrani [5] analyzed experimentally the influence of dimple aspect ratio, temperature ratio, Reynolds number and flow structures in a dimpled channel at Reynolds number varying from 600 to 11,000 and H/D ratio varying as 0.20, 0.25, 0.5 and 1.00. The results showed that the vortex pairs which were periodically shed from the dimples become stronger as channel height decreases with respect to the imprint diameter.

Oliveira et.al.[6] studied the Nusselt number behavior on deep dimpled surface. Experimental results were presented for a dimpled test surface placed on one wall of a channel. Reynolds number was varied from 12,000 to 70,000 whereas δ/D ratio was kept as 1.0. These results were compared to measurements from other investigations with different δ/D ratios to provide information on the influences of dimple depth. These results include local Nusselt numbers and globally averaged Nusselt numbers. Results showed that at all Reynolds number considered, local Nusselt number augmentations increases as the δ/D ratio increases from 0.2 to 0.3 (and all other experimental and geometric parameters were held constant).

Giram and Patil [7] have studied the heat transfer characteristics and the pressure drop of the forced convection apparatus of six dimpled plates. Six test plates with varying dimple densities were taken and by varying the input voltage Nusselt Number variation was recorded. It was found that Nusselt Number increases as the dimple density increases and also the heat transfer rate from the test surface increases with increase in mass flow rate of flowing fluid and heat input.

Burgess and Ligrani [8] showed the experimental results for the dimple depth to dimple print diameter (δ/D) ratios varying as 0.1, 0.2, and 0.3 to provide information on the influences of dimple depth. They reported that at all Reynolds numbers considered, Nusselt number augmentations increases as dimple depth increases.

Beves et.al.[9] studied the flow structure within a two-dimensional spherical cavity on a flat surface, numerically and experimentally. They observed that the recirculation zone formed inside the cavity slightly reciprocate around itself.

Patil and Deshmukh[10] have find out the staggered arrangement of almond shape dimples. The results integrated that staggered array of dimple in circular tube has 66% greater thermal performance factor than inline arrangement. The overall heat transfer coefficients were also increased.

3. Experimental Work

3.1 Experimental Setup

In this work Strip plate heater was fabricated to provide heat input to the test surface. The capacity of the heater was to vary heat input from 40 W to 140 W. The provision was made to fix the heater at the base of the each test plate. Pressure drop across the test section was measured using micro manometer. In the air flow bench the pipe was used to connect the blower outlet to heat exchange module to carry the forced air from blower to the heat exchange module. Next to the blower outlet, flow regulating valve was connected to the pipe to regulate the air flow. Air flows parallel to the dimpled test surface. Velocity of air flow over plate measure by using turbine meter at exit of experiment set up. The strip plate heater fixed at the bottom of the test plate, was connected to power socket through dimmer stat. Dimmer stat readings were varied to give the required heat input to the test plate. Calibrated Iron-Constantan thermocouple wires were used to measure the temperatures. Provisions were made to fix the thermocouple junction on the test surface. Temperatures of air at inlet and outlet of the heat exchange module are also measured Digital temperature indicators were used to show the temperature readings (in °C) recorded by thermocouple wires. Only top dimpled surface of the test plate was exposed to the air stream from which the convective heat transfer to the air stream takes place. The remaining four non-dimpled sides of the test plates were also insulated.



Fig.1 Experimental Setup

3.2 Test Plates

Fig.2 and Fig.3 shows the image and schematic of dimpled plate with spherical inline and staggered plates of dimples on the top surface (204 & 187 dimples) respectively. Fig.4 and Fig. 5 shows the schematic of conical inline and staggered dimpled plate with 192 number of dimples on its top surface respectively.

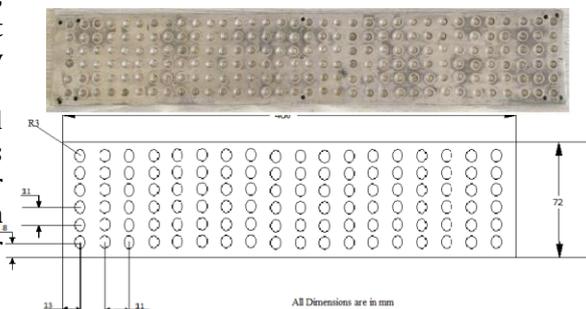


Fig.2 Test plate with inline spherical dimples

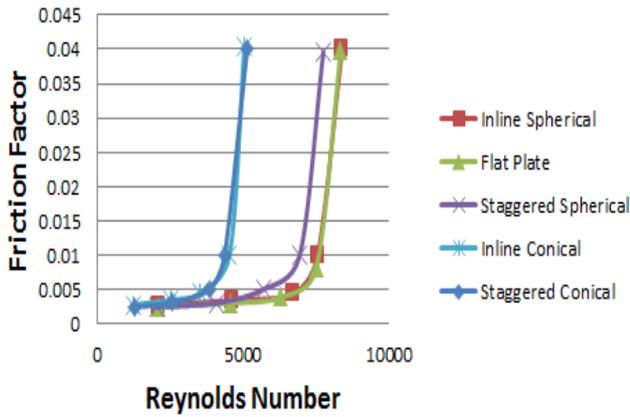


Fig.7 Variation of Friction factor with Re at 120 V

Fig. 6 and fig. 7 shows the variation of friction factor with Reynolds number for plate with one side dimples. It clearly shows that friction factor for the dimpled surface is far better than for the flat plate. Also it shows that range of friction factor for staggered arrangement is higher than for the inline arrangement. Because of strong vortex formation in the downstream region friction factor is increased.

4.2 Nusselt Number Ratio

Nusselt number ratios are computed for different dimple density on plate, it is found that range of Nusselt number ratio for dimpled plate with conical staggered arrangement (192 dimples) is higher compared to the dimpled plate with inline spherical arrangement (204 dimples) as shown in fig. 8 and fig. 9. The Nu/Nu_0 ratio is higher due strong vortices formation in staggered arrangement. Because of this turbulence is more in case of staggered arrangement. There is some decrease in Nusselt number ratio because of fluid entrapment in the pockets of the dimples.

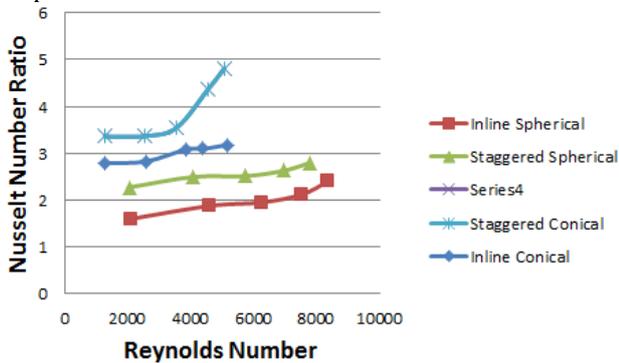


Fig.8 Variation of Nusselt Number ratio with Re at 60 V

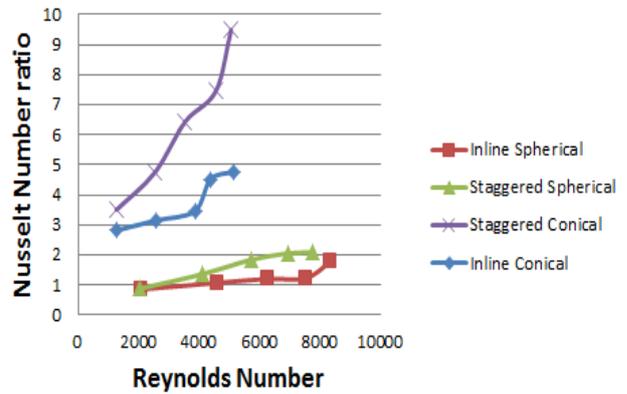


Fig.9 Variation of Nusselt Number ratio with Re at 120 V

4.3 Thermal Performance

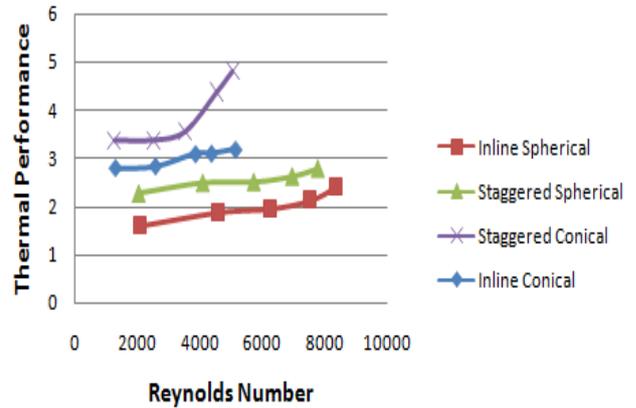


Fig.10 Variation of Thermal Performance with Re at 60 V

Thermal performance for the plate with spherical dimples and conical dimples is drawn fig. 10 and fig. 11 for 60V and 120V respectively, shows that thermal performance is increasing with increase in Reynolds number. But the thermal performance plate with inline spherical (204) dimples is poor as compared to the plate with staggered conical (192) dimples. This is due more turbulence and strong vortex formation in staggered arrangement plate. Also it reflects that thermal performance of staggered conical dimples is more than other which means applying dimple with staggered arrangement in beneficial to increase heat transfer enhancement.

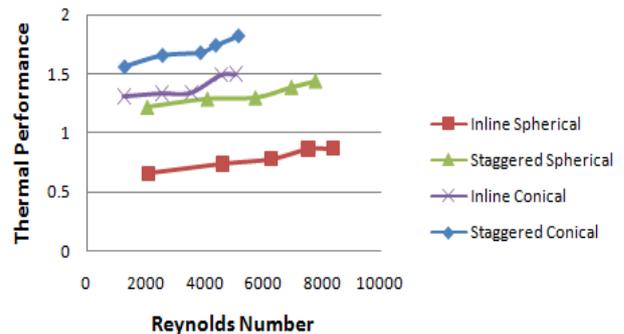


Fig.11 Variation of Thermal Performance with Re at 120 V

Conclusions

In the present work aluminum plates of dimensions 400x72x6 mm³ were used as test surfaces. Variation of Nusselt numbers with Reynolds numbers is investigated, with various parameters combinations. Effect of dimple density and dimple arrangement on heat transfer in terms of Nusselt number enhancement is also reported. Pressure drop obtain is very negligible for more heat transfer enhancement on dimpled surfaces. The present work was towards experimental determination of effect of dimples on heat transfer over a flat surface under forced convection condition.

The main conclusions are summarized as:

- 1) With increase in Reynolds number of flowing fluid and heat input, heat transfer rate from the test surface increases.
- 2) The use of dimples on the surface results in heat transfer augmentation in forced convection heat transfer with lesser pressure drop penalty.
- 3) The value of maximum Nusselt number obtained for staggered arrangement for conical dimples is greater than that for inline conical, spherical and staggered spherical arrangement, keeping all other parameters constant. It shows that for heat transfer enhancement conical staggered arrangement is more effective than the inline arrangement.
- 4) At all Reynolds number considered Nusselt number rises as the dimple density of test plates increases.

References

- [1] Moon H.K., T. O'Connell, Glezer B., "Channel Height Effect on Heat Transfer and Friction in a Dimpled Passage", *ASME J. Gas Turbine and Power*, 122, April 2000, pp.307-313.
- [2] Iftikarahamad H. Patel, Dr. Sachin L. Borse, Experimental Investigation Of Heat Transfer Enhancement Over The Dimpled Surface, *International Journal of Engineering Science and Technology (IJEST)*, ISSN : 0975-5462 Vol. 4 No.08 August 2012.
- [3] Kuethe A. M., 1971, "Boundary Layer Control of Flow Separation and Heat Exchange," US Patent No. 3,578,26
- [4] Syred N., Khalatov A., Kozlov A., Shchukin A., Agachev R., 2001, "Effect of Surface Curvature on Heat Transfer and Hydrodynamics within a Single Hemispherical Dimple" *ASME, Journal of Turbomachinery*, October 2001, Vol. 123, pp. 609-613
- [5] Mahmood, G. I., Ligrani, P. M., "Heat Transfer in a dimpled channel: combined influences of aspect ratio, temperatur6e ratio, Reynolds number and flow structure", *International Journal heat Mass Transfer* 45, 2011-2020, 2002.
- [6] Oliveira M. M., Burgess N. K., Ligrani P. M., "Nusselt Number Behavior on Deep Dimpled Surfaces Within a Channel", *ASME Journal of Heat Transfer*, 125, August 2003, pp.11-18.
- [7] Dhananjay R. Giram, A.M. Patil, "Experimental and Theoretical Analysis Of Heat Transfer Augmentation From Dimpled Surface" *International Journal of Engineering Research and Applications*, Volume 3, Issue 5.
- [8] Burgess N.K., Ligrani P.M., "Effects of Dimple Depth on Channel Nusselt Numbers and Friction Factors", *ASME Journal of Heat Transfer*, 127, August 2005, pp.839-847.
- [9] Beves C.C., Barber T.J., Leonardi E., "An Investigation of Flow over a Two-Dimensional Circular Cavity", *15th*

Australasian Fluid Mechanics Conference, The University of Sydney, Sydney, Australia 13-17 December 2004.

[10] Pooja Patil, Prof. Padmakar Deshmukh, "An Experimental Study of Heat Transfer Enhancement in the Circular Channel with Almond Shape Dimples" *IOSR Journal of Mechanical and Civil Engineering*, Volume 11, pp 48-57