

Automatic Irrigation System

ISSN 2395-1621

^{#1}J.D.Harurkar, ^{#2}N.Deshpande, ^{#3}S.Sontakke, ^{#4}A.Gaikwad,
^{#5}M.Mahajan

²nikitadeshpande1894@gmail.com

^{#12345}Department of Computer Engineering,

GHRCEM, Pune, Maharashtra, India



ABSTRACT

As a water requirement in irrigation is large, there is a need for automatic irrigation system that can save the water. This prototype aims at saving time and avoiding problems like constant vigilance and human labour. It also helps in water conservation by automatically providing water to field depending on their requirements. It also prove to be efficient in Fields, Lawns & Parks. As technology is advancing, we can reduce risks and make work simpler. Arduino provide solutions for many problems. Android application precisely controls water system for gardens/fields by using Arduino. It is achieved by installing water sensors and moisture sensors in the field to monitor the water level and soil moisture which transmits the data to Arduino for estimation of water demands of plants.

Keywords: Soil Moisture, Temperature, Resistance Temperature Detector (RTD), Moisture Sensor, Relay, Microcontroller.

ARTICLE INFO

Article History

Received: 8th April 2017

Received in revised form :
8th April 2017

Accepted: 10th April 2017

Published online :

17th April 2017

I. INTRODUCTION

In the present era one of the greatest problems faced by the world is water shortage and agriculture being a important occupation consumes lots of water. Therefore something is required that uses water judiciously. Automatic irrigation systems estimate and measure level of existing field moisture in order to operate and control an irrigation system, restoring water as needed while minimizing use of water.

The soil moisture based irrigation control [1] uses Unique techniques, which are relatively simple but these quantities are related through a soil water characteristic that is specific to type of soil. Also sensors used require routine maintenance for proper performance. Intelligent automatic plant irrigation system [2] concentrates watering plants regularly without human monitoring using a moisture sensor. The circuit is build around comparator Op-amp which drives a relay to switch on motor. The system uses hardware component, which is subjected to variation in the environmental conditions. An Android application is used for monitoring and activating the motor and scheduling irrigation process. Prototyped a real-time, smart sensor array for measuring soil moisture and soil temperature. This system is not specific for a particular field and hence its usage is not limited. Proper scheduling of irrigation is important for efficient water utilization in crop production, particularly under conditions of water shortage. The effects of applied

amount of irrigation water, irrigation frequency and water use are particularly important. To improve water utilization there must be a proper irrigation scheduling strategy. So our project devices a simple system, using a microcontroller to automate the irrigation and to use minimum water according to requirements.

II. WHY NEED THIS SYSTEM

Until quite recently, India enjoyed abundant water resources. But population growth and overexploitation has led to a situation where the demand for water is exceeding supply.

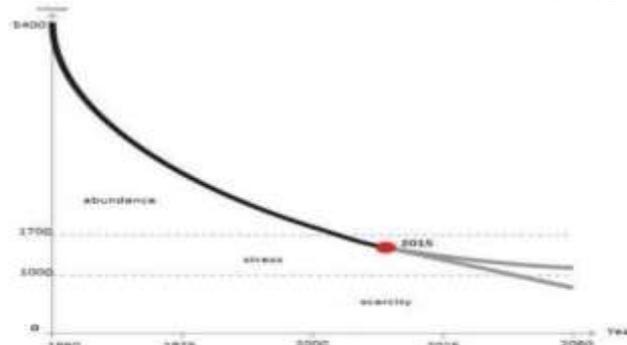


Fig1: The graph shows exponential decrease of water per capita.

From the graph we can notice that the water availability is more. If this rate continues, then we would face severe water shortage. So there is an urgent need to conserve water. During manual irrigation, the water requirement of plants/crops is not monitored. Even when the soil is moist enough, water is still provided. This water is not absorbed by the plants and thus is wasted. Hence a system is to monitor the water requirements of the plant is needed. Also Automatic Irrigation System installation means decreased o expense by maintenance personnel.

III. SYSTEM OVERVIEW

This prototype monitors the amount of soil moisture and water level. A predefined range of soil moisture and water is set, and can be varied with soil type. In case the moisture or water of the soil deviates from the specified range, the system is turned on/off. In case of dry soil and high water level, it will activate the irrigation system, pumping water for watering the plants.

The block diagram of smart irrigation system is represented in Fig1. It consists of a microcontroller (ATmega328) which is the brain of the system. Both the moisture and temperature sensors are connected to the input pins of the controller. The water pump and the servo motor are coupled with the output pins. If the sensors depart from the predefined range, the controller turns on the pump. The servo motor is used to control the angular position of the pipe, which ensures equal distribution of water to the soil. An LED indicator indicates the status of the pump.

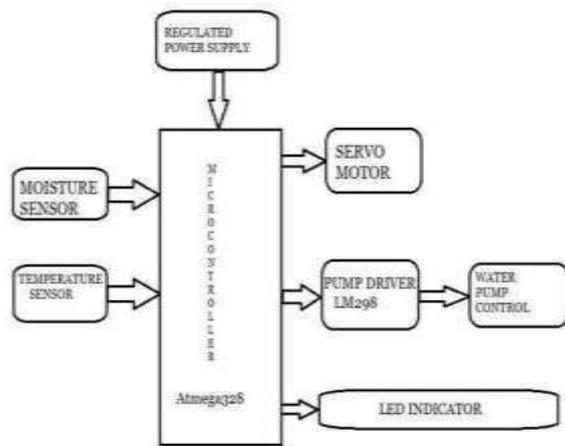


Fig2: block diagram of smart irrigation system

This system can be implemented on large scale for farming purposes, which can further prove to be more advantageous. Owing to prevailing conditions and water shortages, the optimum irrigation schedules should be determined especially in farms to conserve water.

IV. PROJECT DESCRIPTION

Hardware Components:

1) Soil Moisture Sensor- soil moisture sensors estimates the soil volumetric water content based on the dielectric constant (soil bulk permittivity) of the soil. The dielectric constant can be thought of as the soil's ability to transmit electricity. The

dielectric constant of soil increases as the water content of the soil increases. This response is due to the fact that the dielectric constant of water is much larger than the other soil components, including air. Thus, measurement of the dielectric constant gives a predictable estimation of water content. It consists of a pair of electrodes to measure the resistance of the soil. Greater the resistance, lower the moisture content of the soil.

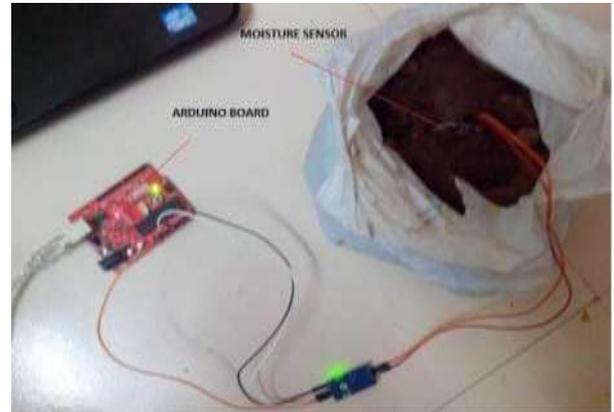


Fig3: Moisture sensor connected to the input pin of the microcontroller

2) Temperature Sensor- A Resistance Temperature Detector(RTD) is used to measure temperature as a function of resistance. As the temperature of the soil increases, the resistance of the soil also increases. RTDs readings are more accurate and more repeatable

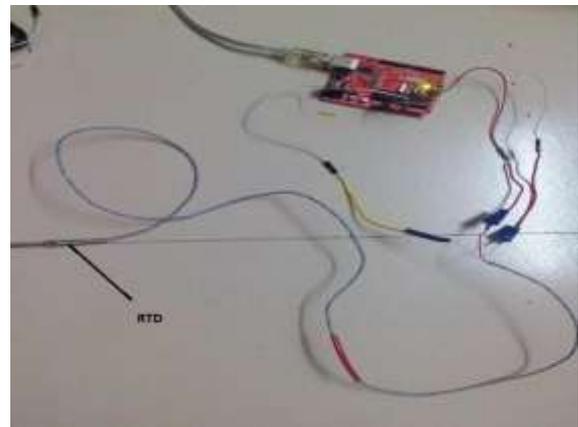


Fig4: RTD connected to the input of the microcontroller

3) Relay- it is used to switch on/off the pump according to the watering requirement of the soil.

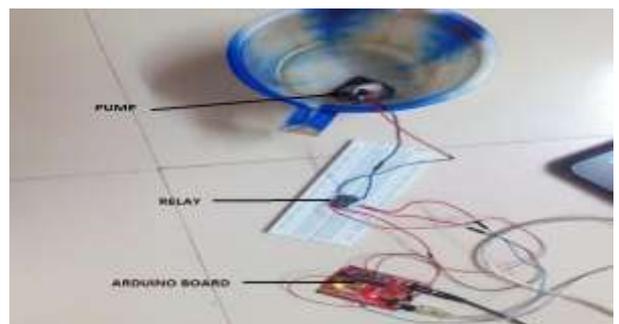


Fig5: interfacing Arduino with pump and relay

4) Servo Motor and Rotating Platform- to take the water pipe to water the target plot. In order to control the spray distance and angle, we use a servo motor.

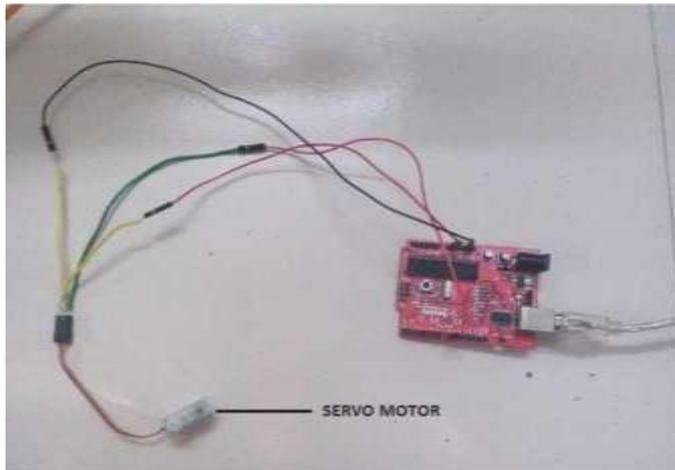


Fig6: Sevo motor connected to the Arduino Board

Hardware Design:

In our model, we are demonstrating watering of two pots, so two moisture sensor and one water sensor is used. Depending on the number of pots, the number of moisture sensor and water sensor to be interfaced with the board will vary. When the soil moisture sensor is interfaced with the board, the sensor reports values of resistances of the soil in which it is immersed into. As soil moisture sensor is analog, an inbuilt ADC in Arduino is used to convert into its digital form (0-1023), which represents resistance. Dry soil will have the maximum resistance and wet soil will have least resistance. Similarly, The temperature sensor (RTD) reports values of temperature in terms of resistance. If water level of soil is high, then the sensor reports high value of resistance and vice versa. The servo motor is programmed to rotate from 0 to 180 degree. It is a 3.3V motor and does not require any driver. The rotating platform is attached on the motor to provide a base for the movement of the pipe. If the soil is dry, temperature sensor and moisture sensor values will be high, so the pump is turned on using a relay and switched off when the values reach a threshold. The vice versa is applicable for moist soil.

Software Design:

The software used in our project is Arduino. It provides a number of libraries to make programming simple. In our prototype, the controller is programmed in Arduino. The program in Arduino designates a preset range of resistance value in digital format (ranging from 0 to 1023) for both the moisture and the temperature sensor. Any aberration from the set range switches on/off the pump, to water the plants. Also an Android application is used for controlling and monitoring Arduino

V. ADVANTAGES OF THE SYSTEM

This technology is recommended for efficient automated irrigation systems and it may provide a valuable tool for conserving water planning and irrigation scheduling which is extendable to other similar agricultural crops. Maximum absorption of the water by the plant is ensured by spreading the water uniformly using a servo motor. So there is

minimal wastage of water. This system also allows controlling the amount of water delivered to the plants when it is needed based on types of plants by monitoring soil moisture and temperature. This project can be used in large agricultural area where human effort needs to be minimized. Many aspects of the system can be customized and fine tuned through software for a crop requirement.

VI. RESULT

The smart irrigation system was tested on a garden plant. The plant's water requirement is 600- 800mm a day and temperature requirement of the soil ranges from 50oC- 80oC. In the Arduino code, the moisture and temperature range were set as 200-600 and 400-750 respectively (which delineates the corresponding resistance value in digital format). Moreover this system proves to be cost effective and proficient in conserving water and reducing its wastage.

VII. CONCLUSION

In the present era, the farmers use irrigation technique through the manual control, in which the farmers irrigate the land at regular intervals [5]. This process seems to consume more water and results in water wastage.

Moreover in dry areas where there is inadequate rainfall, irrigation becomes difficult. Hence we require an automatic system that will precisely monitor and control the water requirements in the field. Installing Smart irrigation system saves time and ensures judicious usage of water. Moreover this architecture uses microcontroller which promises an increase in system life by reducing power consumption.

VIII. FUTURE SCOPE

Our project can be improvised by adding a Webscaper which can predict the weather and water the plants/crops accordingly. If rain is forecasted, less water is let out for the plants. A water meter can be installed to estimate the amount of water used for irrigation and thus giving a cost estimation. Furthermore, Wireless sensors can also be used.

ACKNOWLEDGEMENT

We would like to extend our sincere thanks to all those who played a role in the completion of this project. Firstly, we are highly indebted to our college GHRCEM, Pune for their constant supervision and support. We would also like to thank Mrs. Manjushree Mahajan for her guidance, and encouragement throughout the project work. Lastly, we are immensely grateful to all those involved in this project as without their inspiration and valuable suggestion it would not have been possible to develop the project within the prescribed time period.

REFERENCES

- [1] Rafael Munoz-Carpena and Michael D. Dukes, Automatic Irrigation Based on Soil Moisture for Vegetable Crops, IFAS Extension, 2005.

- [2] K.N.Manjula B.Swathi and D.Sree Sandhya , Intelligent Automatic Plant Irrigation System.
- [3] G. Vellidis , M. Tucker, C. Perry, C. Kvien, C. Bednarz, "A Real-Time Wireless Smart Sensor Array for Scheduling Irrigation", National Environmentally Sound Production Agriculture Laboratory (NESPAL), 2007.
- [4] Constantinos Marios Angelopoulos, Sotiris Nikolettseas , Georgios Constantinos Theofanopoulos, A Smart System for Garden Watering using Wireless Sensor Networks, MobiWac ,October 31-November 4, 2011.
- [5] R.suresh, S.Gopinath, K.Govindaraju, T.Devika, N.Suthanthira Vanitha, GSM based Automated Irrigation Control using Raingun Irrigation System, International Journal of Advanced Research in Computer and Communication Engineering ,Vol. 3, Issue 2, February 2014.