

Hi-Tech ATM Security System

^{#1}Mrigakshi Drabu, ^{#2}Snehal Ashturkar, ^{#3}Shivani Amilkanthwar, ^{#4}Jignesh Borase,
^{#5}Mrs. Manisha Rakate



^{#12345}Department of Computer Engineering

JSPM NTC Pune, Maharashtra, India.

ABSTRACT

It is observed that the numbers of crime related to ATM is increasing day by day so there is need to provide better security to ATM machines .In our survey paper we are proposing a technique by using sensors like RFID, Gyroscope, Vibration sensor and Servo Motor by which any theft activity found in ATM system can be detected and caught red handed.

Key Words: ATM, RFID, Gyroscope, Vibration Sensor, Servo Motor

ARTICLE INFO

Article History

Received: 20th June 2020

Received in revised form :

20th June 2020

Accepted: 22nd June 2020

Published online :

23rd June 2020

I. INTRODUCTION

The numbers of robberies are increasing day by day and have been a great challenge put in front of public and concerned agencies like banking sectors. Today banking sector is one of the most important parts of a human day to day life. Banking facilities grow faster so people used these facilities for their economies activities. ATM (Automatic Teller Machine) is one of a facility which is provided by the bank to the customer. ATMs are located in different places and the customers can make basic transactions without the help of bank staff, due to this use of the ATM machine increase widely as shown in Fig.1. In Fig. 1, shows that in the year 2014 use of ATM machine is less as compared with the year 2016. In the year 2019, the use of ATM increases all most 75% with respect to the year 2016. The customer can access their bank account from ATM system using a PIN number which provided to the customer from bank. This PIN number is totally confidential. Crime related to ATM increases day by day. Fig.2 shows a graph of ATM frauds which increases widely. The crime which is happening in ATM becomes a serious issue so ATM security also a serious issue.

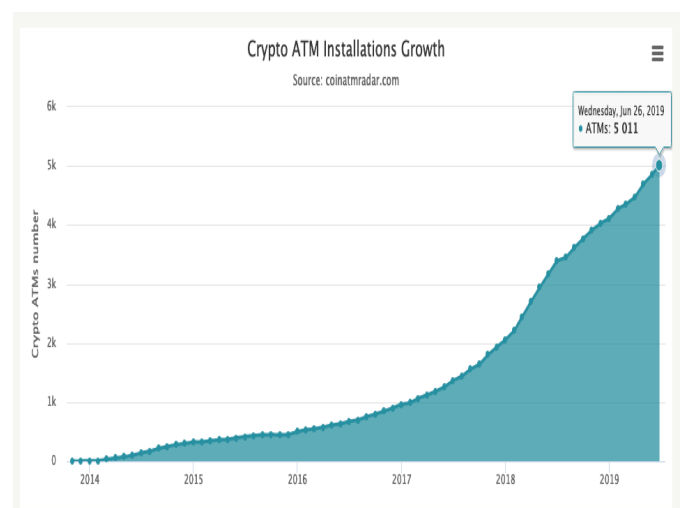


Fig 1. ATM Growth

Once the card of the customer is lost and PIN number is known hacker can withdraw all the money in a short period. So to avoid ATM related frauds there are various methods to provide security to withdraw money and detect any illegal activity.

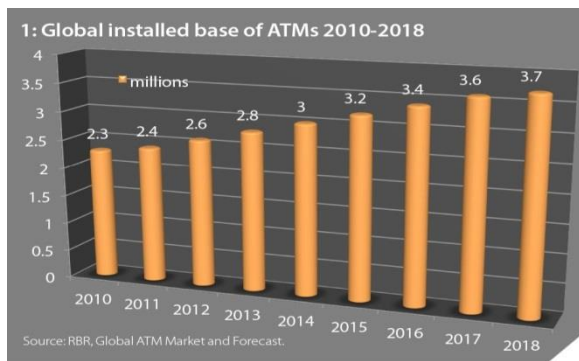


Fig 2. ATM Frauds Detected

To provide a security to a transaction or to identify where the person is authorized or not various methods are introduced in ATM system. Many times thieves try to take the ATM Machine with them or try to damage the machine using some tools like hammer for stealing of money. These activities can be handled by considering some technologies which is GSM Module for sending the messages to the police station or the banking sector for any fraud detection and the other one is the Shutter Technology which makes use of servo motor and Gyroscope by interfacing them. When the robber tries to do these illegal activities in ATM system the shutter gets closed from outside. The main work focused on Shutter technique to provide enhanced security to ATM while GSM based technique is also implemented for the same purpose. This system uses a combination of the both techniques. In hi-tech security system there are various sensors used like Gyroscope, RFID Tag, RFID Reader, Servo Motor and GSM Module which have been designed to enhance the security of ATM. In this paper we have developed an affordable and reliable system using Arduino.

II. SYSTEM ARCHITECTURE

In this project we are using an Arduino Uno. When the robbery is held in ATM security system there can be two possibilities by which stealing of cash could be done. One way is that the robber may try to damage the system and use some tool like hammer to break it, at that time vibration sensor will detect vibrations and will generate output for servo motor which will help the shutter to shut down.

At the same time the message will be sent with the help of GSM module to the nearest police station or the banking sector.

The second possible way is that robber may try to take the whole ATM system with himself. In that case ATM machine has Gyroscope sensor which is placed on the top of the machine and if any severe moment is detected in the machine that is if the Gyroscope having X,Y and Z axis. Any of the axes gets deflected from its position the output to servo motor will be sent and the shutter will get locked.

Along with that a message will be sent to nearby police station or the banking sector.

Also if these both illegal practices are occurred at the same time the message will be sent and also the shutter will be closed till the police or people from banking sector reaches that place.

The RFID tag and RFID card reader is used for the authentication purpose so that the person from banking sector can stop the security system of the ATM machine for the transfer of money in ATM machine and for that purpose the threshold value is set. In that fixed given time the money should be deposited otherwise the machine security system gets activated.

Using the RFID tag which is only accessible by the banking sector person can stop the system which is read by the RFID reader in the ATM machine.



Fig3. Working module of system.

III. ADVANTAGES

- We can monitor any illegal activity.
- With the help of advance sensors we are able to caught the robbers and protect the cash.
- Alert message will be send to mobile phone of banking authority or police.

IV. APPLICATIONS

- Provide safety to machine from distrustful activities.
- Protect cash from thieves
- To avoid robberies and caught robbers then and there.

V. CONCLUSION

Securities provided by previous technologies are less significant and allowing frauds at ATM. There is a need to add some extra features in previous technology to enhance ATM security. We have implemented GSM technology and Shutter technology is more secured than previous ones and provides high performance with hi-tech security system.

IV. REFERENCES

- [1]. Satyasai Tummala,D.Vasavi,“An Advanced ATM Crime Prevention System”,IJSC. 2014
- [2]. Arjun Kumar Mistry, Suraj Kumar and Vicky Prasa“Secured Atm Transaction Using Gsm”,IJEETC, Vol 2, No.3, July 2013.
- [3]. Sivakumar T., Gajjala Askok, k. Sai Venuprathap, “Design and Implementation of Security Based ATM theft Monitoring system”, IJEI,Vol. 3, August 2013.
- [4]. Ari Juels, “RFID Security and Privacy: A Research Survey”, IEEE Journal, VOL. 24, NO. 2, February 2006.
- [5]. Divyan M. Konidala, Daeyoung Kim, Chan Yeob Yeun, Byoungcheon Lee “Security Framework for RFID-based Applications in Smart Home Environment”,JIPS, Vol 7,No. 1, March 2011
- [6]. S.P.Balwir, K.R.Katole, R.D.Thakare, N.S.Panchbudhe, Mr.P.K.Balwir, “Secured ATM Transaction System Using MicroController”,IJARCSSE,2014
- [7]. Soniya B. Milmile, Amol k. Boke “Review Paper On Real Time Password AuthenticationSystem For Atm”, IJAICT Vol. 1, November 2014.
- [8]. Gurudatt Kulkarni,Ramesh Sutar, Sangita Mohite, “RFID Security Issues & Challenges”, ICECS ,2014. on a Mobile Computing Platform”, in proceedings of IEEE-Computer Software and Applications Conference (COMPSAC), 1-5 July 2015, Taichung, Taiwan.
- [9]. Karamdeep Singh, Gurmeet Kaur “Radio Frequency Identification:
- [10]. Applications and Security Issues”, IEEE Second International Conference on Advanced Computing & Communication Technologies 2012.
- [11]. G. Renee Jebaline, S. Gomathi “A Novel Method to Enhance the Security of ATM usingBiometrics”, ICCPCT, 2015.
- [12]. Mahesh A. Patil,Sachin P.Wanere, Rupesh P.Maighane, Aashay R.Tiwari, “ATM Transaction Using Biometric Fingerprint Technology”, IJECSCSE, Vol. 2.