

Implementing Advanced Traffic Control System using RFID Ambulance Clearance & Stolen Vehicle Detection



^{#1}Prof.Pranjali Nikam, ^{#2}Mr.Abhijit Ghadge, ^{#3}Mr.Ganesh Yadhav, ^{#4}Mr.Shrikant Kakade, ^{#5}Mr.Yogesh Jathar

¹abhighadge09@gmail.com
²ganeshyadavr007@gmail.com

^{#1}Prof. Department of Information Technology
^{#2345}Department of Information Technology
G.H.Raisoni Institute Of Engineering And Technology, Pune

ABSTRACT

We present a universal network for intelligent traffic control system to pass emergency vehicles smoothly. Each individual vehicle is equipped with special radio frequency identification (RFID) tag. We use RFID reader, to read the RFID tags attached to the vehicle. It counts number of vehicles that passes on a particular path during a specified duration. It also determines the network congestion, and hence the green light duration for that path. It will also collect fine form bank account if any vehicle violates the traffic signal rule. In addition, when an emergency response vehicle is approaching the junction, it will communicate to the traffic controller in the junction to turn ON the green light.

Keywords: RFID reader, Zigbee Sender, Data Mining.

ARTICLE INFO

Article History

Received :5th April 2016

Received in revised form :
7th April 2016

Accepted : 9th April 2016

Published online :

11th April 2016

I. INTRODUCTION

INDIA is the second most populous Country in the World and is a fast growing economy. It is seeing terrible road congestion problems in its cities. Infrastructure growth is slow as compared to the growth in number of vehicles, due to space and cost constraints. Also, Indian traffic is non lane based and chaotic. It needs a traffic control solutions, which are different from the developed Countries. Intelligent management of traffic flows can reduce the negative impact of congestion. In recent years, wireless networks are widely used in the road transport as they provide more cost effective options. Technologies like ZigBee, RFID and GSM can be used in traffic control to provide cost effective solutions. RFID is a wireless technology that uses radio frequency electromagnetic energy to carry information between the RFID tag and RFID reader. Some RFID systems will only work within the range inches or centimeters, while others may work for 100 meters (300 feet) or more. A GSM modem is a specialized type of modem, which accepts a SIM card and operates over a subscription to a mobile operator, just like a mobile phone. AT commands are used to control modems. These commands come from Hayes commands that were used by the Hayes smart modems. The ZigBee operates at low-power and can be used at all the levels of work

configurations to perform predefined tasks. It operates in ISM bands (868 MHz in Europe, 915 MHz in USA and Australia, 2.4 GHz in rest of the world). Data transmission rates vary from 20 Kilobits/second in the 868 MHz frequency band to 250 Kilobits/second in the 2.4 GHz frequency band. The ZigBee uses 11 channel sin case of 868/915 MHz radio frequency and 16 channel sin case of 2.4 GHz radio frequency. It also uses 2 channel configurations, CSMA/CA and slotted CSMA/CA. The whole paper is grouped into 5 parts. Sections II talks about the literature survey. Section III discusses about the current problems that exist in making way to an ambulance and other vehicles.

It also talks of how the proposed model will overcome the problems faced in developing Countries as well as developed countries. Section IV gives the implementation-details of the proposed model. Section V presents the enhancement of this work.

II. LITERATURE SURVEY

Traffic congestion is a major problem in cities of developing Countries like India Growth in urban population and the middle-class segment contribute significantly to the rising number of vehicles in the cities. Congestion on roads

eventually results in slow moving traffic, which increases the time of travel, thus stands-out as one of the major issues in metropolitan cities. In green wave system was discussed, which was used to provide clearance to any emergency vehicle by turning all the red lights to green on the path of the emergency vehicle, hence providing a complete green way to the desired vehicle. A green wave is the synchronization of the green phase of traffic signals. With a green wave setup, a vehicle passing through a green signal will continue to receive green signals as it travels down the road. In addition to the green wave path, the system will track a stolen vehicle when it passes through a traffic light. Advantage of the system is that GPS inside the vehicle does not require additional power. The biggest disadvantage of green waves is that, when the wave is disturbed, the disturbance can cause traffic problems that can be exacerbated by the synchronization.

In such cases, the queue of vehicles in a green wave grows in size until it becomes too large and some of the vehicles cannot reach the green lights in time and must stop. This is called over saturation. In the use of RFID traffic control to avoid problems that usually arise with standard traffic control systems, especially those related to image processing and beam interruption techniques are discussed. This RFID technique deals with multivehicle, multilane, multi road junction areas. It provides an efficient time management scheme, in which, a dynamic time schedule is worked out in real time for the passage of each traffic column. The real-time operation of the system emulates the judgment of a traffic policeman on duty. The number of vehicles in each column and the routing are proprieties, upon which the calculations and the judgments are done. The disadvantage of this work is that it does not discuss what methods are used for communication between the emergency vehicle and the traffic signal controller. In it proposed a RFID and GPS based automatic lane clearance system for ambulance.

The focus of this work is to reduce the delay in arrival of the ambulance to the hospital by automatically clearing the lane, in which, ambulance is travelling, before it reaches the traffic signal. This can be achieved by turning the traffic signal, in the path of the ambulance, to green when the ambulance is at a certain distance from the traffic junction. The use of RFID distinguishes between the emergency and non-emergency cases, thus preventing unnecessary traffic congestion. The communication between the ambulance and traffic signal post is done through the transceivers and GPS. The system is fully automated and requires no human intervention at the traffic junctions. The disadvantage of this system is it needs all the information about the starting point, end point of the travel. It may not work, if the ambulance needs to take another route for some reasons or if the starting point is not known in advance. Traffic is a critical issue of transportation system in most of all the cities of Countries. This is especially true for Countries like India and China, where the population is increasing at higher rate.

For example, Bangalore city, has witnessed a phenomenal growth in vehicle population in recent years. As a result, many of the arterial roads and intersections are operating over the capacity (i.e., v/c is more than 1) and average journey speeds on some of the key road sin the central areas are lower than 10 Km/h at the peak hour. In some of the main challenges are management of more than

36,00,000 vehicles, annual growth of 7-10% in traffic, roads operating at higher capacity ranging from 1 to 4, travel speed less than 10 Km/h at some central areas in peak hours, insufficient or no parking space

for vehicles, limited number of policemen. In currently a video traffic surveillance and monitoring system commissioned in Bangalore city. It involves a manual analysis of data by the traffic management team to determine the traffic light duration in each of the junction. It will communicate the same to the local police officers for the necessary actions.

III. PROBLEM STATEMENT

It can be seen that, existing technologies are insufficient to handle the problems of congestion control, emergency vehicle clearance, stolen vehicle detection, etc. To solve these problems, we propose to implement our Intelligent Traffic Control System. It mainly consists of three parts. First part contains automatic signal control system. Here, each vehicle is equipped with an RFID tag. When it comes in the range of RFID reader, it will send the signal to the RFID reader. The RFID reader will track how many vehicles have passed through for a specific period and determines the congestion volume. Accordingly, it sets the green light duration for that path. Second part is for the emergency vehicle clearance. Here, each emergency vehicle contains ZigBee transmitter module and the ZigBee receiver will be implemented at the traffic junction. The buzzer will be switched ON when the vehicle is used for emergency purpose.

This will send the signal through the ZigBee transmitter to the Zig-Bee receiver. It will make the traffic light to change to green. Once the ambulance passes through, the receiver no longer receives the ZigBee signal and the traffic light is turned to red. The third part is responsible for stolen vehicle detection. Here, when the RFID reader reads the RFID tag, it compare sit to the list of stolen RFIDs. If a match is found, it sends SMS to the police control room and changes the traffic light to red, so that the vehicle is made to stop in the traffic junction and local police can take appropriate action. List of components used in the experiment are CC2500RF module, MicrochipPIC16F877A, RFID Reader125KHzTTL and SIM300 GSM module.

IV. PROPOSED SYSTEM

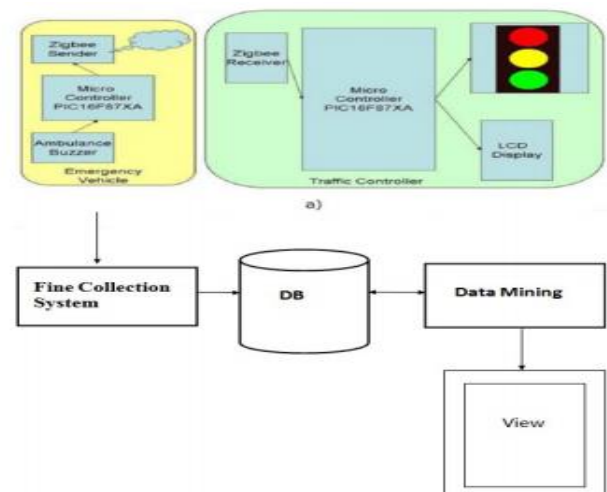


Fig 1. Block Diagram

V. ADVANTAGES

Advantages

1. Giving priority to Emergency Vehicles.
2. Collecting traffic data in real time.
3. Managing the traffic lights system.
4. Collecting Fine from Traffic Rule Violators from their bank accounts.

VI CONCLUSION

With automatic traffic signal control based on the traffic density in the route, the manual effort on the part of the traffic policeman is saved. As the entire system is automated, it requires very less human intervention. With stolen vehicle detection, the signal automatically turns to red, so that the police officer can take appropriate action, if he/she is present at the junction. Also SMS will be sent so that they can prepare to catch the stolen vehicle at the next possible junctions. Emergency vehicles like ambulance, fire trucks, need to reach their destinations at the earliest. If they spend a lot of time in traffic jams, precious lives of many people may be in danger. With emergency vehicle clearance, the traffic signal turns to green as long as the emergency vehicle is waiting in the traffic junction. The signal turns to red, only after the emergency vehicle passes through. Further enhancements can be done to the prototype by testing it with longer range RFID readers. Also GPS can be placed into the stolen vehicle detection module, so that the exact location of stolen vehicle is known. Currently, we have implemented system by considering one road of the traffic junction. It can be improved by extending to all the roads in a multi-road junction.

REFERENCES

- [1] G. Varaprasad and R. S. D. Wahidabanu, "Flexible routing algorithm for vehicular area networks," in Proc. IEEE Conf. Intell. Transp. Syst. Telecommun., Osaka, Japan, 2010, pp. 30-38.
- [2] B. P. Gokulan and D. Srinivasan, "Distributed geometric fuzzymultiagent urban traffic signal control," IEEE Trans. Intell. Transp. Syst., vol. 11, no. 3, pp. 714-727, Sep. 2010.
- [3] K. Sridharamurthy, A. P. Govinda, J. D. Gopal, and G. Vara-prasad, "Violation detection method for vehicular ad hoc network-ing," Security Commun.Netw., to be published.[Online].Available: <http://onlinelibrary.wiley.com/doi/10.1002/sec.427/abstract>
- [4] M. Abdoos, N. Mozayani, and A. L. C. Bazzan, "Traffic light control in non-stationary environments based on multi agent Q-learning," in Proc. 14th Int. IEEE Conf. Intell. Transp. Syst., Oct. 2011, pp. 580-1585.
- [5] ZigBee Specifications, ZigBee Alliance IEEE Standard 802.15.4k2013,2014.[Online].Available: <http://www.zigbee.org/Specifications.aspx>

[6] Traffic Congestion in BangaloreA Rising Concern. [Online].Available:<http://www.commonfloor.com/guide/traffic-congestion-in-bangalore-arising-concern-27238.html>, accessed 2013.

[7] A. K. Mittal and D. Bhandari, "A novel approach to implement green wave system and detection of stolen vehicles," in Proc. IEEE 3rd Int. Adv. Comput., Feb. 2013, pp. 1055-1059.

[8] P. Sood. "Bangalore Traffic Police-Preparing for the Future"[Online]. Available:<http://www.intranse.in/its1/sites/default/files/D1-S2>, accessed 2011.15

[9] Traffic Management Centre. [Online]. Available: <http://www.bangaloretrafficpolice.gov.in/index.php?option=comcontent&view=article&id=87&Itemid=87>, accessed 2014.